

Infinix NOTE 5 Stylus

Quick Guide

Hereby, INFINIX MOBILITY LIMITED

Declares that this Mobile Phone is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

Know your phone


- ① Earphone Jack
- ② Front camera
- ③ Camera
- ④ Volume Button
- ⑤ Power Button
- ⑥ USB Jack
- ⑦ Front Flash
- ⑧ Flash
- ⑨ Fingerprint



Getting started

Insert SIM card & Memory card

- ① Push the holder in the SIM card slots next to the thimble hole it pops out.
- ② Place the SIM cards face down and align it with the opening of the holder.
- ③ Insert them into the SIM card slots of the phone properly.




Charging the phone

You can charge your device using a charger or by connecting it to the computer using a USB cable (comes with the phone).

Note: Only use compatible charger; immovable inbuilt battery.

The phone can be restarted by holding the power button for 10 seconds.

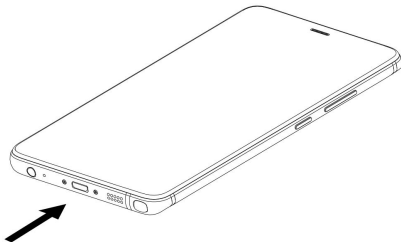

CAUTION(A/D)

1. Use carefully with the earphone maybe excessive sound pressure from earphones and headphones can cause hearing loss.
2. Risk of explosion if battery is replaced by an incorrect type, dispose of used batteries according to the instructions.
3. The product shall only be connected to a USB interface of version USB2.0
4. Adapter shall be installed near the equipment and shall be easily accessible.
5. EUT Temperature: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$.
6. Charging Temperature: $0^{\circ}\text{C} \sim +55^{\circ}\text{C}$
7. Adapter1: CQ-18BX
Input: AC 100-240V~50/60Hz, 0.6A
Output: DC 5-9V 2A
DC 9-12V 1.5A
Adapter2: CQ-18ZX
Input: AC 100-240V~50/60Hz, 0.6A
Output: DC 5-9V 2A
DC 9-12V 1.5A
8. The device complies with RF specifications when the device used at 5mm from your body.
9. To prevent possible hearing damage, do not listen at high volume levels for long periods.
10. Earphone and USB cable are shielded.
11. Use the device only with the earphones included, never change the earphones included for another one.
12. This device may be restricted for use, depending on the local network.

Restrictions in the 5GHz band:

According to 10(10) of Directive 2014/53/EU, the packaging shows that this radio equipment will be subject to some

restrictions when placed on the market in Belgium(BE),Bulgaria(BG),the Czech Republic(CZ),Denmark(DK),Germany(DE) Estonia(EE),Ireland(IE),Greece(EL),Spain(ES),France(FR),Croatia(HR),Italy(IT),Cyprus(CY),Latvia(LV),Lithuania(LT), Luxembourg(LU),Hungary(HU),Malta(MT),Netherlands(NL),Austria(AT),Poland(PL),Portugal(PT),Romania(RO),Slovenia (SK),Finland(FI),Sweden(SE),the United Kingdom(UK),Turkey(TR),Norway(NO),Switzerland(CH),Iceland(IS),and Lichtenst-ein(LI).

The WLAN function for this device is restricted to indoor use due to its operation in the 5.15 to 5.35 GHz frequency ranges.

Operating Frequency Band (RF):

E-GSM900: 880 to 915MHz (TX), 925 to 960MHz (RX);

DCS1800: 1710 to 1785 MHz (TX), 1805 to 1880 MHz (RX);

WCDMA BAND I: 1920 to 1980 MHz (TX), 2110 to 2170 MHz (RX);

WCDMA BAND VIII: 880 to 915MHz (TX), 925 to 960MHz (RX);

LTE Band 3: 1710 to 1785MHz(TX), 1805 to 1880MHz (RX);

LTE Band 7: 2500 to 2570 MHz (TX), 2620 to 2690 MHz (RX);

LTE Band 20: 832 to 862 MHz (TX), 791 to 821 MHz (RX);

LTE Band 40: 2300 to 2400 MHz(TX), 2300 to 2400 MHz(RX);

Bluetooth: 2400 to 2483.5MHz (TX/RX) ;

WIFI (2.4G) : 2412 to 2472MHz (TX/RX) ;

WIFI (5G) : Band 1: 5150 MHz to 5250 MHz(TX/RX)

Band 2: 5250 MHz to 5350 MHz(TX/RX)

Band 3: 5470 to 5725 MHz(TX/RX)

GPS: 1.57542GHz;

FM: 87.5 MHz to 108 MHz.

Modulation mode:

GMSK, 8PSK (GSM)

BPSK/QPSK/16-QAM (WCDMA)

QPSK, 16-QAM, 64-QAM (LTE)

GFSK, $1/4 \pi$ - DQPSK, 8DPSK (BT)

GFSK (BLE)

OFDM for IEEE 802.11g/n(HT-20) /n(HT-40) (WiFi)

IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)

BPSK (GPS)

RF Output Power:

GSM900: 33dBm $\pm$ 2dB

GSM1800: 30dBm $\pm$ 2dB

WCDMA BAND I/VIII: 24dBm + 1.7dB / - 3.7dB

LTE BAND3/7/20/40: 23dBm + 2.7dB / - 2.7dB

Bluetooth: 0-10 dBm

WiFi: 14dBm $\pm$ 3dB

Specific Absorption Rate (SAR) Certification

THIS DEVICE MEETS INTERNATIONAL GUIDELINES FOR EXPOSURE TO RADIO WAVES

Body parts	Test value	Test distance	Limit
Head	0.406W/Kg10g	0mm	2.0 W/Kg10g
Body	0.987W/Kg10g	5mm	2.0 W/Kg10g



Figure 1 - Warning label (IEC 60417-6044)

Declaration of conformity

We: INFINIX MOBILITY LIMITED

(Name of manufacturer)

RMS 05-15, 13A/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17 CANTON RD TST KLN HONG KONG.

(Address)

declare under our own responsibility that the product

Product name : Mobile phone

Model No.: X605

Trademark: Infinix

(Including product name, model No. descriptions, versions and supplementary characteristics)

to which this declaration refers conforms with the relevant standards or other standardising documents

3.1a Health: EN 50360:2017

EN 50566:2017

EN 62479:2010

3.1a Safety: EN 60950-1:2006+A11:2009+A1:2010+A12:2011+ A2:2013

3.1b EMC: Draft ETSI EN 301 489-1 V2.2.0 (2017-03)

Draft ETSI EN 301 489-17 V3.2.0 (2017-03)

Draft ETSI EN 301 489-19 V2.1.0 (2017-03)

Draft ETSI EN 301 489-52 V1.1.0 (2016-11)

EN 55032:2015

EN 55035: 2017

EN61000-3-2:2014

EN61000-3-3:2013

3.2 Radio: ETSI EN 301 511 V12.5.1 (2017-03)

ETSI EN 301 908-1 V11.1.1 (2016-07)

ETSI EN 301 908-2 V11.1.1 (2016-07)

ETSI EN 301 908-13 V11.1.2 (2017-07)

ETSI EN 300 328 V2.1.1 (2016-11)

ETSI EN 303 413 V1.1.1 (2017-06)

Final Draft ETSI EN 303 345 V1.1.7(2017-03)

ETSI EN 301 893 V2.1.1 (2017-05)

Software Version: X605-H632ACD-O-PR1-180317V79

Hardware Version: V1.1

Adapter1: CQ-18BX

Input: AC 100-240V~50/60Hz, 0.6A

Output: DC 5-9V 2A DC 9-12V 1.5A

Adapter2: CQ-18ZX

Input: AC 100-240V~50/60Hz, 0.6A

Output: DC 5-9V 2A DC 9-12V 1.5A

Li-ion Battery : BL-39IX

Voltage: 3.85V

Capacity: 3900mAh/4000mAh(min/typ)


Limited Charge Voltage: 4.4V

1. Notified body involved: TÜV Rheinland LGA Products GmbH, 0197.
2. Performed conformity assessment according to Directive Annex III Module B of the 2014/53/EU Radio Equipment Directive (RED) and issued the EU-type examination certificate.
3. This declaration of conformity is issued under the sole responsibility of the manufacturer.
4. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation: Directive 2014/53/EU
Other Union harmonisation legislation where applicable

Place and date of issue (of this DoC): Shenzhen/2018-5-2

Lebin, Xie/Manager
(Name / Title)

(Name and signature of person responsible)

A handwritten signature in black ink that reads "Lebin, Xie". The signature is written in a cursive, slightly slanted style.

CAUTION(C/E)

1. Use carefully with the earphone maybe excessive sound pressure from earphones and headphones can cause hearing loss.
2. Risk of explosion if battery is replaced by an incorrect type, dispose of used batteries according to the instructions.
3. The product shall only be connected to a USB interface of version USB2.0
4. Adapter shall be installed near the equipment and shall be easily accessible.
5. EUT Temperature: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$.
6. Charging Temperature: $0^{\circ}\text{C} \sim +55^{\circ}\text{C}$
7. Adapter1: CQ-18BX
Input: AC 100-240V~50/60Hz, 0.6A
Output: DC 5-9V 2A
DC 9-12V 1.5A
Adapter2: CQ-18ZX
Input: AC 100-240V~50/60Hz, 0.6A
Output: DC 5-9V 2A
DC 9-12V 1.5A
8. The device complies with RF specifications when the device used at 5mm from your body.
9. To prevent possible hearing damage, do not listen at high volume levels for long periods.
10. Earphone and USB cable are shielded.
11. Use the device only with the earphones included, never change the earphones included for another one.
12. This device may be restricted for use, depending on the local network.

Restrictions in the 5GHz band:

According to 10(10) of Directive 2014/53/EU, the packaging shows that this radio equipment will be subject to some r

restrictions when placed on the market in Belgium(BE),Bulgaria(BG),the Czech Republic(CZ),Denmark(DK),Germany(DE), Estonia(EE),Ireland(IE),Greece(EL),Spain(ES),France(FR),Croatia(HR),Italy(IT),Cyprus(CY),Latvia(LV),Lithuania(LT),Luxembourg(LU),Hungary(HU),Malta(MT),Netherlands(NL),Austria(AT),Poland(PL),Portugal(PT),Romania(RO),Slovenia(SK),Finland(FI),Sweden(SE),the United Kingdom(UK),Turkey(TR),Norway(NO),Switzerland(CH),Iceland(IS),and Lichtenstein(LI). The WLAN function for this device is restricted to indoor use due to its operation in the 5.15 to 5.35 GHz frequency ranges.

Operating Frequency Band (RF):

E-GSM900: 880 to 915MHz (TX), 925 to 960MHz (RX);
DCS1800: 1710 to 1785 MHz (TX), 1805 to 1880 MHz (RX);
WCDMA BAND I:1920 to1980 MHz (TX), 2110 to 2170 MHz (RX);
WCDMA BAND VIII: 880 to 915MHz (TX), 925 to 960MHz (RX);
LTE BAND1: 1920 to 1980MHz(TX), 2110 to 2170MHz(RX);
LTE BAND3: 1710 to 1785MHz (TX), 1805 to 1880MHz(RX);
LTE BAND8: 880 to 915MHz(TX), 925 to 960MHz(RX);
LTE Band 38: 2570 to 2620 MHz(TX), 2570 to 2620MHz(RX);
LTE Band 40: 2300 to 2400 MHz(TX), 2300 to 2400 MHz(RX);
Bluetooth: 2400 to 2483.5MHz (TX/RX) ;
WIFI (2.4G) :2412 to 2472MHz (TX/RX) ;
WIFI (5G) : Band 1: 5150 MHz to 5250 MHz(TX/RX)
Band 2: 5250 MHz to 5350 MHz(TX/RX)
Band 3: 5470 to 5725 MHz(TX/RX)
GPS:1.57542GHz;
FM:87.5 MHz to 108 MHz.

Modulation mode:

GMSK, 8PSK (GSM)

BPSK/QPSK/16-QAM (WCDMA)

QPSK, 16-QAM, 64-QAM (LTE)

GFSK, $1/4 \pi$ - DQPSK, 8DPSK (BT)

GFSK (BLE)

OFDM for IEEE 802.11g/n(HT-20) /n(HT-40) (WiFi)

IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)

BPSK (GPS)

RF Output Power:

GSM900: 33dBm $\pm$ 2dB

GSM1800: 30dBm $\pm$ 2dB

WCDMA BAND I/VIII: 24dBm + 1.7dB / -3.7dB

LTE BAND1/3/8/38/40: 23dBm + 2.7dB / -2.7dB

Bluetooth: 0-10 dBm

WiFi: 14dBm $\pm$ 3dB

Specific Absorption Rate (SAR) Certification

THIS DEVICE MEETS INTERNATIONAL GUIDELINES FOR EXPOSURE TO RADIO WAVES

Body parts	Test value	Test distance	Limit
Head	0.452W/Kg10g	0mm	2.0 W/Kg10g
Body	0.916W/Kg10g	5mm	2.0 W/Kg10g



Figure 1 - Warning label (IEC 60417-6044)

Declaration of conformity

We: INFINIX MOBILITY LIMITED

(Name of manufacturer)

RMS 05-15, 13A/F SOUTH TOWER WORLD FINANCE CTR HARBOUR CITY 17 CANTON RD TST KLN HONG KONG.

(Address)

declare under our own responsibility that the product

Product name : Mobile phone

Model No.: X605

Trademark: Infinix

(Including product name, model No. descriptions, versions and supplementary characteristics)

to which this declaration refers conforms with the relevant standards or other standardising documents

3.1a Health: EN 50360:2017

EN 50566:2017

EN 62479:2010

3.1a Safety: EN 60950-1:2006+A11:2009+A1:2010+A12:2011+ A2:2013

3.1b EMC: Draft ETSI EN 301 489-1 V2.2.0 (2017-03)

Draft ETSI EN 301 489-17 V3.2.0 (2017-03)

Draft ETSI EN 301 489-19 V2.1.0 (2017-03)

Draft ETSI EN 301 489-52 V1.1.0 (2016-11)

EN 55032:2015

EN 55035: 2017

EN61000-3-2:2014

EN61000-3-3:2013

3.2 Radio: ETSI EN 301 511 V12.5.1 (2017-03)

ETSI EN 301 908-1 V11.1.1 (2016-07)

ETSI EN 301 908-2 V11.1.1 (2016-07)

ETSI EN 301 908-13 V11.1.2 (2017-07)

ETSI EN 300 328 V2.1.1 (2016-11)

ETSI EN 303 413 V1.1.1 (2017-06)

Final Draft ETSI EN 303 345 V1.1.7(2017-03)

ETSI EN 301 893 V2.1.1 (2017-05)

Software Version: X605-H632ACD-O-PR1-180317V79

Hardware Version: V1.1

Adapter1: CQ-18BX

Input: AC 100-240V~50/60Hz, 0.6A

Output: DC 5-9V 2A DC 9-12V 1.5A

Adapter2: CQ-18ZX

Input: AC 100-240V~50/60Hz, 0.6A

Output: DC 5-9V 2A DC 9-12V 1.5A

Li-ion Battery : BL-39IX

Voltage: 3.85V

Capacity: 3900mAh/4000mAh(min/typ)

Limited Charge Voltage: 4.4V

1. Notified body involved: TÜV Rheinland LGA Products GmbH, 0197.

2. Performed conformity assessment according to Directive Annex III Module B of the 2014/53/EU Radio Equipment Directive (RED) and issued the EU-type examination certificate.

3. This declaration of conformity is issued under the sole responsibility of the manufacturer.

4. The object of the declaration described above is in conformity with the relevant Union harmonisation legislation: Directive 2014/53/EU


Other Union harmonisation legislation where applicable

Place and date of issue (of this DoC): Shenzhen/2018-5-2

Lebin, Xie/Manager

(Name / Title)

(Name and signature of person responsible)

A handwritten signature in black ink that reads "Lebin, Xie". The signature is written in a cursive, slightly slanted style.